


Key Guide



1. Press to turn on the power and activate the LCD display.
2. Press and hold for 2 seconds to turn off the power.
3. In standby mode, press this button once to turn off the LCD display.
4. After power on, the screen displays the total DC output power
5. Press to display the power of each USB port, press this button again to turn off the screen display.

Screen Guide

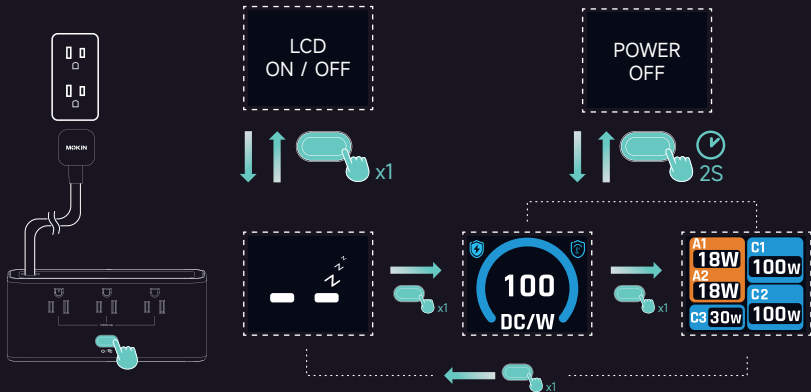

DC Power screen



Power screen

When the port is connected, the content of the corresponding port will display the current power.

Temperature icon



Normal



Medium



High

Circuit icon



Normal status



Overcurrent
Short circuit
Abnormal


One-port Charging Guide



USB-A1 / A2 Output: **22.5W Max**



USB-C1 / C2 Output: **100W Max**

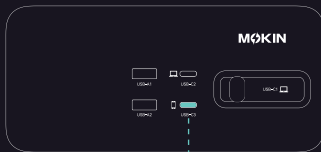


USB-C3 Output: **30W Max**


Dual-port Charging Guide



*
USB-A1+A2 Output: **15W**

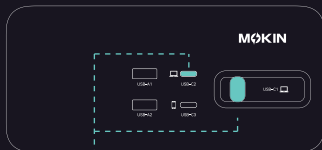


*
USB-C1+C2 Output: **65W+30W**

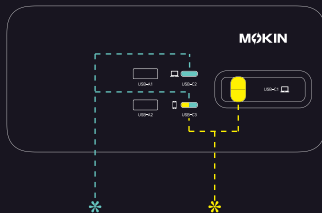

*
USB-C1 / C2+C3 Output: **65W+30W**


Dual-port Charging Guide

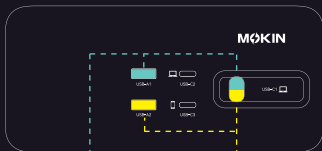

USB-C1+A1 / A2 Output: **65W+22.5W**




USB-C2+A1 / A2 Output: **65W+22.5W**

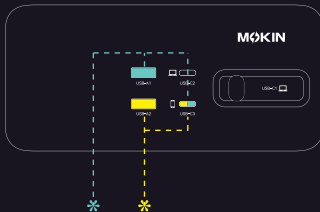


USB-C3+A1 / A2 Output: **30W+22.5W**

Three-port Charging Guide

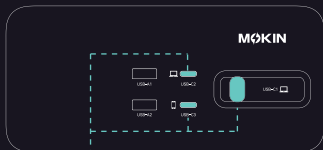


* USB-C1+C2+C3 Output:

60W+20W+20W

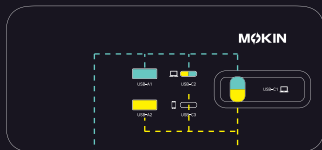

* USB-C1+C2+A1 / A2 Output:

60W+20W+18W

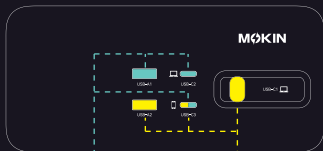

* USB-C1 / C2+C3+A1 / A2 Output :


60W+20W+18W



* USB-C3+ (A1+A2) Output :

30W+15W

Four-port Charging Guide

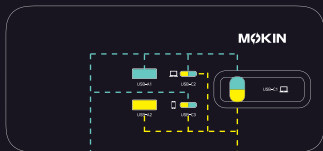


USB-C1+C2+C3+A1 / A2 Output:

45W+20W+20W+15W



USB-C1+C2+(A1+A2) Output:

65W+20W+15W

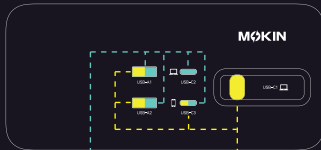

USB-C1 / C2+C3+(A1+A2) Output:

65W+20W+15W

Five-port Charging Guide



*

USB-C1+C2+C3+(A1+A2) Output:

45W+20W+20W+15W